

RSTD06 SEPARATOR

THE RSTD06 PACKS A POWERFUL COMBINATION OF VERSATILITY,
DURABILITY AND RELIABILITY.



THE BEEHIVE® RSTD06 BRINGS SOLID DESIGN AND UNMATCHED
DURABILITY TO ANY PRODUCTION LINE, DAY IN AND DAY OUT.

The Beehive® RSTD06 is widely recognized as the most versatile separator in the world. Its unique ability to handle a broad range of raw products that other separators cannot handle, puts it in a class by itself. Its precise controls allow the operator to generate a variety of textures, resulting in extraordinary “bite”, the capability to produce the best texture and the most premium end product possible.

With heavy-duty construction, low maintenance costs, a well-established track record of reliability and satisfied customers in over 50 countries worldwide, you owe it to your bottom line to start putting the RSTD06 to work on your processing line.



BEEHIVE® RSTD06 SPECIFICATIONS & FEATURES

APPLICATION

- Deboning
- Desinewing
- Defatting

RAW MATERIAL

- Pork
- Chicken
- Beef
- Turkey
- Fish
- Mutton


SPECIFICATIONS

- Total Horsepower: 55 (41 kw)
- Auger Horsepower: 40
- Auger speed (constant): 206 RPM
- Pump Horsepower: 15
- Pump speed (variable): 26 to 78 RPM
- Twin Feedscrew Pump
- Drive Assembly: Chain Drive
- Hopper capacity: 10.3 cu. ft. (292 L)
- Input capacity (varies with product):
3,000-7,000 lbs (1,361-3,175 kg)
- Machine Weight (uncrated): 4,000 lbs (1818 kg)
- Estimated Crated Weight: 4,500 lbs (2045 kg)



INNOVATIVE ENGINEERING FOR YOUR HEAVY-DUTY APPLICATIONS.

Rugged, stainless-steel construction, thick-walled steel chambers and a powerful feeding mechanism allows the Beehive® RSTD06 to successfully tackle even your most challenging meat processing assignments. In addition, the RSTD06's patented arcuate chamber technology allows repeated adjustments for wear compensation, resulting in exceptional durability.

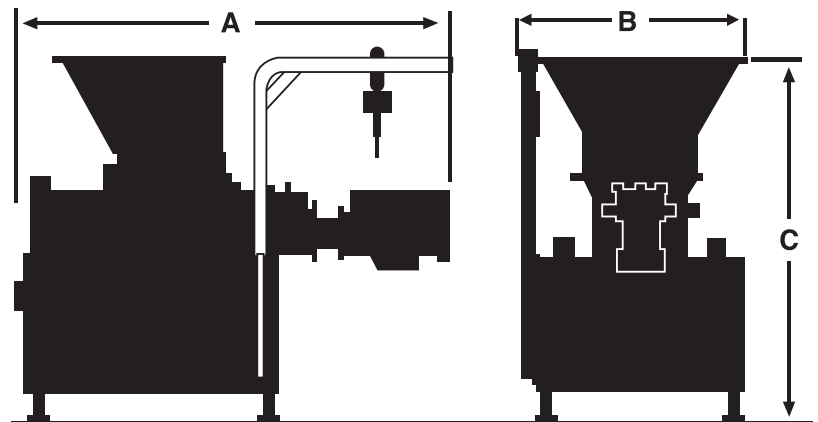

DIMENSIONS

- A. 88.4 in (2245 mm)
- B. 42.6 in (1082 mm)
- C. 75.7 in (1922 mm)

